SX4® Loop cloud effect, courtesy Kahekili Maui Arts Center

CAUTION

When using a DMX device with a discharge lamp such as CDM or an HMI, it's suggested that you separate the power circuit for the discharge lamp from the DMX control device. When using DMX controlled units such as an Indexing TwinSpin™ or SX4® Gobo Changer or DMX Loop Tray, the "noise" from the discharge lamp ballast may cause some interference and or damage the electronics. For best results we recommend providing separate line voltage to the DMX devices and the discharge light fixture.

PRODUCT DESCRIPTION

SX4® DMX Loop Tray

- For theme parks, display & theatrical applications
- Slides into SX4® Case mounted in ETC Source Four™
- Over 40 pattern loops available off-the-shelf
- Custom pattern loops available
- Integrated speed control and reverse switch - Integrated control can be used with a dimmer for mastering a group of SX4® units and for control from a light board.
- Pattern loop life span is 4,000 hours of continuous use - ideal for theme park and retail applications

The SX4® DMX Loop Tray is designed to fit into the SX4® Case which is attached to an ETC Source Four™ Fixed Focus Ellipsoidal Spotlight (see SX4®Case Specifications). The Loop Tray will accept a continuous loop pattern. The speed and direction of the loop can be controlled from a

PRODUCT SPECIFICATIONS

Dimensions:
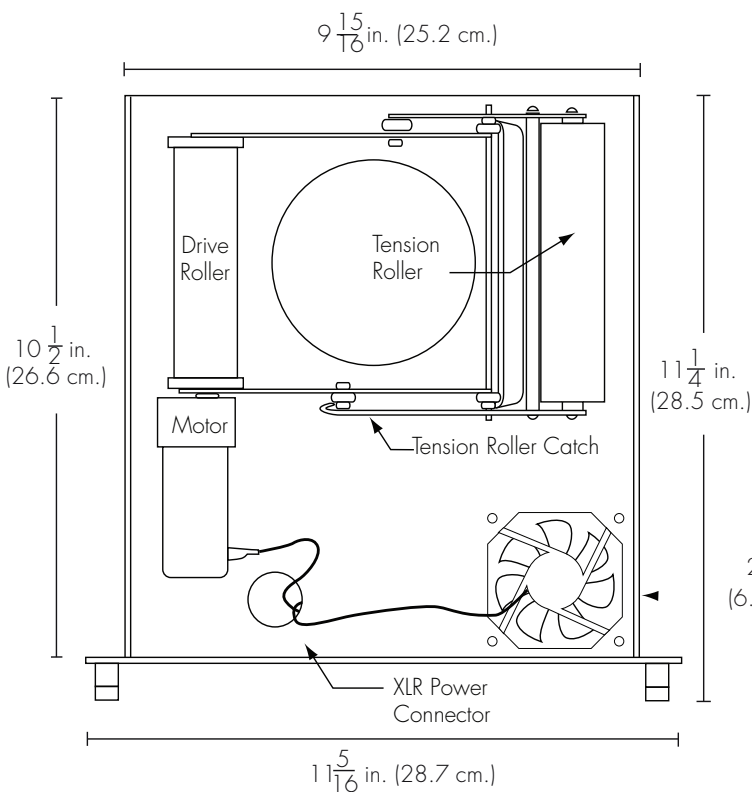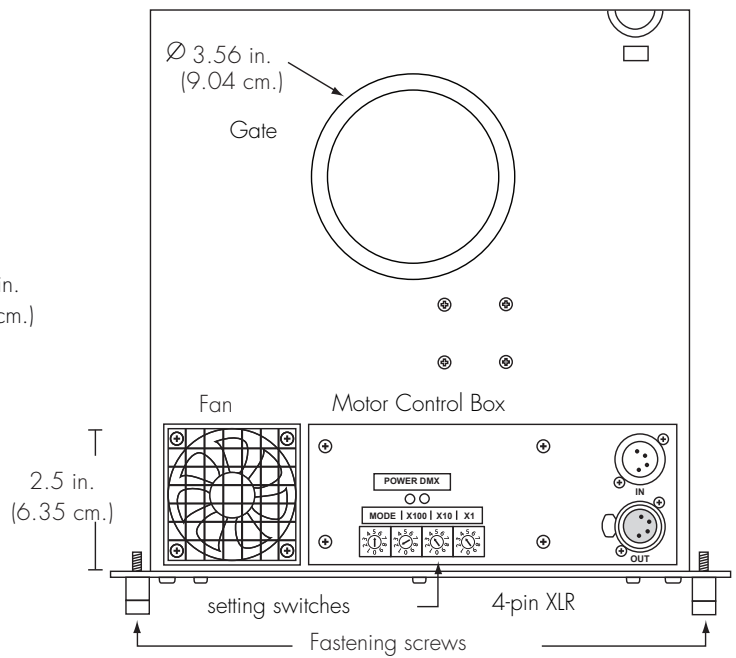|	
Wide:	11.31 in. (28.7 cm.)
Height:	11.25 in. (28.5 cm.)
Deep:	3.0625 in. (7.7 cm.)
Weight :	3 lbs.,5 oz. (1.44 kgs.)
With SX4® Case:	9 lbs., 10 oz. (4.28 kgs.)
Finish:	Matte black paint
Power Draw:	.3 amp at 120v with our 24 VDC transformer TSPS-20

DMX signal (by others). A DMX power supply is required. With a large number of off-the-shelf effects using GAM FX/Loops you can quickly create a variety of different projected images. Moving clouds, rain, snow, fire, water ripples, water falls, stars and so much more are as easy as selecting the appropriate FX/Loop from your catalog. The SX4®has been used on Broadway, in operas, film, television, special events, theme parks and retail store displays, anywhere that a special lighting effect is required. Reliable, efficient, long life and easy to use features set the SX4®projection system apart from all other choices.
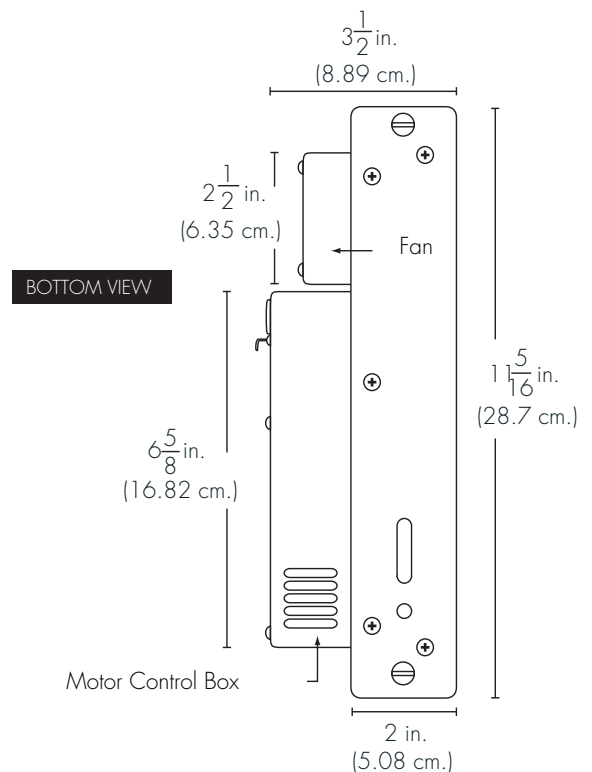
r⚫sco
www.rosco.com

FRONT VIEW

$9\frac{15}{16}$ in. (25.2 cm.)

Drive Roller

Tension Roller

$10\frac{1}{2}$ in. (26.6 cm.)

Motor

Tension Roller Catch

$11\frac{1}{4}$ in. (28.5 cm.)

XLR Power Connector

$11\frac{5}{16}$ in. (28.7 cm.)

FRONT VIEW

BACK VIEW

$\varnothing$ 3.56 in. (9.04 cm.)

Gate

Fan

Motor Control Box

POWER DMX

MODE | X100 | X10 | X1

setting switches

4-pin XLR

IN

OUT

2.5 in. (6.35 cm.)

Fastening screws

BACK VIEW

PRODUCT NUMBER

TS6111 / 206 36200 0120
SX4®, DMX Loop Tray (24v PSU not incl)
TS6111FS / 206 36210 0120
SX4® + Shutters, DMX Loop Tray (24v PSU not incl)
TS6211 / 206 36250 0000
SX4®, Tray Only - DMX Loop
TS6211WHT / 206 36251 0000
SX4®, Tray Only (white) - DMX Loop
TS6130 / 206 36300 0000
SX4®, Effects Disk Tray DMX (24v PSU not incl)
TS6130WHT / 206 36301 0000
SX4® white Effects Disk Tray DMX (24v PSU not incl)
TS6130FS / 206 36310 0000
SX4®+Shutter Effect Disk Tray DMX (24v PSU not incl)
TS6130FSWHT / 206 36311 0000
SX4®+Shutter wht Effect Disk Tray DMX (24vPSU not incl)

Power supply (order separately) is required in both stand alone and DMX operation. DMX cable and power cables supplied by others. Power supply options as follows:

TSPS20 / 205 71420 0050   PSU 50 (no DMX pass-thru)
TSPS20 / 205 71421 0050   White PSU 50 (no DMX pass-thru)
TSPS80 / 205 71480 0120   PSU 200 - 120v only
TSPS82 / 205 71482 0240   PSU 200 - 230v only

BOTTOM VIEW

$3\frac{1}{2}$ in. (8.89 cm.)

$2\frac{1}{2}$ in. (6.35 cm.)

Fan

BOTTOM VIEW

$6\frac{5}{8}$ in. (16.82 cm.)

$11\frac{5}{16}$ in. (28.7 cm.)

Motor Control Box

2 in. (5.08 cm.)

rosco
www.rosco.com